



Shanghai Vibgyor Intelligence Technology Co.,Ltd

Add: Building 57, NO.499 Changshi Road, Shihudang Town, Songjiang District, Shanghai.

Website: [Http://www.vibgyor-industry.com](http://www.vibgyor-industry.com)

Email: info@vibgyor-industry.com



CONTENTS

	»	IP20-320 Pages:003-008
	»	IP67-320 Pages:011-016
	»	IP20-480 Pages:019-023
	»	IP67-480 Pages:025-029
	»	RGB Pages:031
	»	Double color temperature Pages:032
	»	Colorful cob strip Pages:033



IP20-320


IP20-320 4MM




IP Rate



Beam Angle



Color Option



Voltage	Code	Color	Watts	Lumen	Efficiency	Scissors	Width
12VDC Ra90 IP20	HC-04500-S0440-A2090-A-5W/M	2000K	5	380	70-80	25mm	4mm
	HC-04500-S0440-A2790-A-5W/M	2700K	5	482	90-100	25mm	4mm
	HC-04500-S0440-A3090-B-5W/M	3000K	5	532	100-110	25mm	4mm
	HC-04500-S0440-A4090-C-5W/M	4000K	5	583	110-120	25mm	4mm
	HC-04500-S0440-A5090-D-5W/M	5000K	5	634	120-130	25mm	4mm
	HC-04500-S0440-A6590-C-5W/M	6500K	5	558	110-120	25mm	4mm
24VDC Ra90 IP20	HC-04500-S0820-A2090-A-5W/M	2000K	5	380	70-80	50mm	4mm
	HC-04500-S0820-A2790-A-5W/M	2700K	5	482	90-100	50mm	4mm
	HC-04500-S0820-A3090-B-5W/M	3000K	5	532	100-110	50mm	4mm
	HC-04500-S0820-A4090-C-5W/M	4000K	5	583	110-120	50mm	4mm
	HC-04500-S0820-A5090-D-5W/M	5000K	5	634	120-130	50mm	4mm
	HC-04500-S0820-A6590-C-5W/M	6500K	5	558	110-120	50mm	4mm

Remarks: Can be customized, product color, circuit board width, and the number of lamp beads customized.

Dimensions





Main Features

- COB high-density flexible soft light strip, soft light, folding resistance and bending resistance, no light spot.
- LED COB flexible light strip, flexible high-brightness self-adhesive line lamp without dark areas, COB high density, low pressure safety, high light transmittance, high luminous efficiency, no led graininess and dark areas

IP20-320


IP20-320 8MM

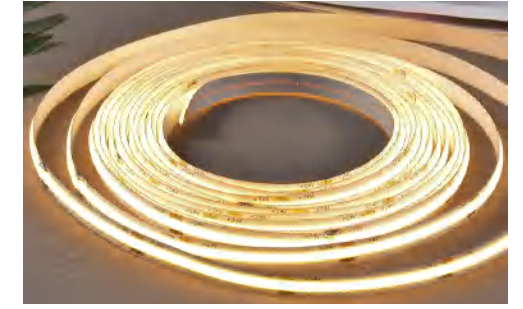


IP Rate



Beam Angle



Color Option



Voltage	Code	Color	Watts	Lumen	Efficiency	Scissors	Width
12VDC Ra90 IP20	HC-08500-S0440-A2090-A-5W/M	2000K	5	388	70-80	25mm	8mm
	HC-08500-S0440-A2790-B-5W/M	2700K	5	491	100-110	25mm	8mm
	HC-08500-S0440-A3090-B-5W/M	3000K	5	543	100-110	25mm	8mm
	HC-08500-S0440-A4090-D-5W/M	4000K	5	595	120-130	25mm	8mm
	HC-08500-S0440-A5090-D-5W/M	5000K	5	646	120-130	25mm	8mm
	HC-08500-S0440-A6590-D-5W/M	6500K	5	569	120-130	25mm	8mm
	HC-08500-S0820-A2090-A-5W/M	2000K	5	388	70-80	50mm	8mm
24VDC Ra90 IP20	HC-08500-S0820-A2790-A-5W/M	2700K	5	491	100-110	50mm	8mm
	HC-08500-S0820-A3090-B-5W/M	3000K	5	543	100-110	50mm	8mm
	HC-08500-S0820-A4090-D-5W/M	4000K	5	595	120-130	50mm	8mm
	HC-08500-S0820-A5090-D-5W/M	5000K	5	646	120-130	50mm	8mm
	HC-08500-S0820-A6590-D-5W/M	6500K	5	569	120-130	50mm	8mm
	HC-08500-S0440-A2090-A-10W/M	2000K	10	768	70-80	25mm	8mm
	HC-08500-S0440-A2790-A-10W/M	2700K	10	973	90-100	25mm	8mm
12VDC Ra90 IP20	HC-08500-S0440-A3090-B-10W/M	3000K	10	1075	100-110	25mm	8mm
	HC-08500-S0440-A4090-C-10W/M	4000K	10	1177	110-120	25mm	8mm
	HC-08500-S0440-A5090-D-10W/M	5000K	10	1280	120-130	25mm	8mm
	HC-08500-S0440-A6590-C-10W/M	6500K	10	1126	110-120	25mm	8mm
	HC-08500-S0820-A2090-A-10W/M	2000K	10	768	70-80	50mm	8mm
	HC-08500-S0820-A2790-A-10W/M	2700K	10	973	90-100	50mm	8mm
24VDC Ra90 IP20	HC-08500-S0820-A3090-B-10W/M	3000K	10	1075	100-110	50mm	8mm
	HC-08500-S0820-A4090-C-10W/M	4000K	10	1177	110-120	50mm	8mm
	HC-08500-S0820-A5090-D-10W/M	5000K	10	1280	120-130	50mm	8mm
	HC-08500-S0820-A6590-C-10W/M	6500K	10	1126	110-120	50mm	8mm

IP20-320

Voltage	Code	Color	Watts	Lumen	Efficiency	Scissors	Width
12VDC Ra90 IP20	HC-08500-S0440-A2090-A-15W/M	2000K	15	1065	60-70	25mm	8mm
	HC-08500-S0440-A2790-A-15W/M	2700K	15	1415	90-100	25mm	8mm
	HC-08500-S0440-A3090-A-15W/M	3000K	15	1491	90-100	25mm	8mm
	HC-08500-S0440-A4090-B-15W/M	4000K	15	1597	100-110	25mm	8mm
	HC-08500-S0440-A5090-C-15W/M	5000K	15	1749	110-120	25mm	8mm
	HC-08500-S0440-A6590-B-15W/M	6500K	15	1521	100-110	25mm	8mm
12VDC Ra90 IP20	HC-08500-S0820-A2090-A-15W/M	2000K	15	1065	60-70	50mm	8mm
	HC-08500-S0820-A2790-A-15W/M	2700K	15	1415	90-100	50mm	8mm
	HC-08500-S0820-A3090-A-15W/M	3000K	15	1491	90-100	50mm	8mm
	HC-08500-S0820-A4090-B-15W/M	4000K	15	1597	100-110	50mm	8mm
	HC-08500-S0820-A5090-C-15W/M	5000K	15	1749	110-120	50mm	8mm
	HC-08500-S0820-A6590-B-15W/M	6500K	15	1521	100-110	50mm	8mm

Remarks: Can be customized, product color, circuit board width, and the number of lamp beads customized.

Dimensions



Main Features

- COB high-density flexible soft light strip, soft light, folding resistance and bending resistance, no light spot.
- LED COB flexible light strip, flexible high-brightness self-adhesive line lamp without dark areas, COB high density, low pressure safety, high light transmittance, high luminous efficiency, no led graininess and dark areas



IP20-320


IP20-320 10MM




IP Rate



Beam Angle



Color Option




Voltage	Code	Color	Watts	Lumen	Efficiency	Scissors	Width
12VDC Ra90 IP20	HC-10500-S0440-A2090-A-5W/M	2000K	5	396	70-80	25mm	10mm
	HC-10500-S0440-A2790-B-5W/M	2700K	5	501	100-110	25mm	10mm
	HC-10500-S0440-A3090-B-5W/M	3000K	5	554	100-110	25mm	10mm
	HC-10500-S0440-A4090-D-5W/M	4000K	5	607	120-130	25mm	10mm
	HC-10500-S0440-A5090-D-5W/M	5000K	5	659	120-130	25mm	10mm
	HC-10500-S0440-A6590-D-5W/M	6500K	5	580	120-130	25mm	10mm
24VDC Ra90 IP20	HC-10500-S0820-A2090-A-5W/M	2000K	5	396	70-80	50mm	10mm
	HC-10500-S0820-A2790-B-5W/M	2700K	5	501	100-110	50mm	10mm
	HC-10500-S0820-A3090-B-5W/M	3000K	5	554	100-110	50mm	10mm
	HC-10500-S0820-A4090-D-5W/M	4000K	5	607	120-130	50mm	10mm
	HC-10500-S0820-A5090-D-5W/M	5000K	5	659	120-130	50mm	10mm
	HC-10500-S0820-A6590-D-5W/M	6500K	5	580	120-130	50mm	10mm
12VDC Ra90 IP20	HC-10500-S0440-A2090-A-10W/M	2000K	10	783	70-80	25mm	10mm
	HC-10500-S0440-A2790-A-10W/M	2700K	10	992	90-100	25mm	10mm
	HC-10500-S0440-A3090-B-10W/M	3000K	10	1096	100-110	25mm	10mm
	HC-10500-S0440-A4090-C-10W/M	4000K	10	1201	110-120	25mm	10mm
	HC-10500-S0440-A5090-D-10W/M	5000K	10	1305	120-130	25mm	10mm
	HC-10500-S0440-A6590-C-10W/M	6500K	10	1149	110-120	25mm	10mm
24VDC Ra90 IP20	HC-10500-S0820-A2090-A-10W/M	2000K	10	783	70-80	50mm	10mm
	HC-10500-S0820-A2790-A-10W/M	2700K	10	992	90-100	50mm	10mm
	HC-10500-S0820-A3090-B-10W/M	3000K	10	1096	100-110	50mm	10mm
	HC-10500-S0820-A4090-C-10W/M	4000K	10	1201	110-120	50mm	10mm
	HC-10500-S0820-A5090-D-10W/M	5000K	10	1305	120-130	50mm	10mm
	HC-10500-S0820-A6590-C-10W/M	6500K	10	1149	110-120	50mm	10mm

IP20-320

Voltage	Code	Color	Watts	Lumen	Efficiency	Scissors	Width
12VDC Ra90 IP20	HC-10500-S0440-A2090-A-15W/M	2000K	15	1086	60-70	25mm	10mm
	HC-10500-S0440-A2790-A-15W/M	2700K	15	1443	90-100	25mm	10mm
	HC-10500-S0440-A3090-A-15W/M	3000K	15	1520	90-100	25mm	10mm
	HC-10500-S0440-A4090-B-15W/M	4000K	15	1629	100-110	25mm	10mm
	HC-10500-S0440-A5090-C-15W/M	5000K	15	1784	110-120	25mm	10mm
	HC-10500-S0440-A6590-B-15W/M	6500K	15	1551	100-110	25mm	10mm
24VDC Ra90 IP20	HC-10500-S0820-A2090-A-15W/M	2000K	15	1086	60-70	50mm	10mm
	HC-10500-S0820-A2790-A-15W/M	2700K	15	1443	90-100	50mm	10mm
	HC-10500-S0820-A3090-A-15W/M	3000K	15	1520	90-100	50mm	10mm
	HC-10500-S0820-A4090-B-15W/M	4000K	15	1629	100-110	50mm	10mm
	HC-10500-S0820-A5090-C-15W/M	5000K	15	1784	110-120	50mm	10mm
	HC-10500-S0820-A6590-B-15W/M	6500K	15	1551	100-110	50mm	10mm

Remarks: Can be customized, product color, circuit board width, and the number of lamp beads customized.

Dimensions



Main Features

- COB high-density flexible soft light strip, soft light, folding resistance and bending resistance, no light spot.
- LED COB flexible light strip, flexible high-brightness self-adhesive line lamp without dark areas, COB high density, low pressure safety, high light transmittance, high luminous efficiency, no led graininess and dark areas



IP67-320

IP67-320 4MM



IP Rate




IP 20 裸板




IP 65 滴胶

Beam Angle



Color Option



Voltage	Code	Color	Watts	Lumen	Efficiency	Width
12VDC Ra90 IP67	HC-04500-S0440-A2090-A-5W/M	2000K	5	388	70-80	4mm
	HC-04500-S0440-A2790-A-5W/M	2700K	5	491	90-100	4mm
	HC-04500-S0440-A3090-B-5W/M	3000K	5	543	100-110	4mm
	HC-04500-S0440-A4090-C-5W/M	4000K	5	595	110-120	4mm
	HC-04500-S0440-A5090-D-5W/M	5000K	5	646	120-130	4mm
	HC-04500-S0440-A6590-C-5W/M	6500K	5	569	110-120	4mm
24VDC Ra90 IP67	HC-04500-S0820-A2090-A-5W/M	2000K	5	388	70-80	4mm
	HC-04500-S0820-A2790-A-5W/M	2700K	5	491	90-100	4mm
	HC-04500-S0820-A3090-B-5W/M	3000K	5	543	100-110	4mm
	HC-04500-S0820-A4090-C-5W/M	4000K	5	595	110-120	4mm
	HC-04500-S0820-A5090-D-5W/M	5000K	5	646	120-130	4mm
	HC-04500-S0820-A6590-C-5W/M	6500K	5	569	110-120	4mm

Remarks: Can be customized, product color, circuit board width, and the number of lamp beads customized.

Dimensions




Main Features

- COB high-density flexible soft light strip, soft light, folding resistance and bending resistance, no light spot.
- LED COB flexible light strip, flexible high-brightness self-adhesive line lamp without dark areas, COB high density, low pressure safety, high light transmittance, high luminous efficiency, no led graininess and dark areas

IP67-320

IP67-320 8MM

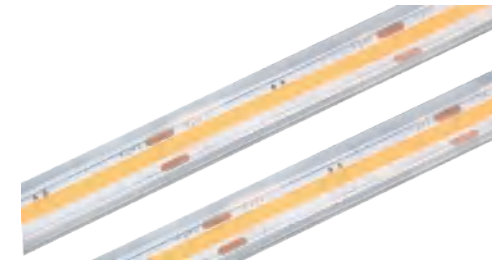

IP Rate



IP 20 裸板




IP 65 滴胶




IP 67 硅胶挤出

Beam Angle



Color Option



Voltage	Code	Color	Watts	Lumen	Efficiency	Width
12VDC Ra90 IP67	HC-08500-S0440-A2090-A-5W/M	2000K	5	396	70-80	8mm
	HC-08500-S0440-A2790-B-5W/M	2700K	5	501	100-110	8mm
	HC-08500-S0440-A3090-B-5W/M	3000K	5	554	100-110	8mm
	HC-08500-S0440-A4090-D-5W/M	4000K	5	607	120-130	8mm
	HC-08500-S0440-A5090-D-5W/M	5000K	5	659	120-130	8mm
	HC-08500-S0440-A6590-D-5W/M	6500K	5	580	120-130	8mm
24VDC Ra90 IP67	HC-08500-S0820-A2090-A-5W/M	2000K	5	396	70-80	8mm
	HC-08500-S0820-A2790-B-5W/M	2700K	5	501	100-110	8mm
	HC-08500-S0820-A3090-B-5W/M	3000K	5	554	100-110	8mm
	HC-08500-S0820-A4090-D-5W/M	4000K	5	607	120-130	8mm
	HC-08500-S0820-A5090-D-5W/M	5000K	5	659	120-130	8mm
	HC-08500-S0820-A6590-D-5W/M	6500K	5	580	120-130	8mm
12VDC Ra90 IP67	HC-08500-S0440-A2090-A-10W/M	2000K	10	783	70-80	8mm
	HC-08500-S0440-A2790-A-10W/M	2700K	10	992	90-100	8mm
	HC-08500-S0440-A3090-B-10W/M	3000K	10	1096	100-110	8mm
	HC-08500-S0440-A4090-C-10W/M	4000K	10	1201	110-120	8mm
	HC-08500-S0440-A5090-D-10W/M	5000K	10	1305	120-130	8mm
	HC-08500-S0440-A6590-C-10W/M	6500K	10	1149	110-120	8mm
24VDC Ra90 IP67	HC-08500-S0820-A2090-A-10W/M	2000K	10	783	70-80	8mm
	HC-08500-S0820-A2790-A-10W/M	2700K	10	992	90-100	8mm
	HC-08500-S0820-A3090-B-10W/M	3000K	10	1096	100-110	8mm
	HC-08500-S0820-A4090-C-10W/M	4000K	10	1201	110-120	8mm
	HC-08500-S0820-A5090-D-10W/M	5000K	10	1305	120-130	8mm
	HC-08500-S0820-A6590-C-10W/M	6500K	10	1149	110-120	8mm

IP67-320

Voltage	Code	Color	Watts	Lumen	Efficiency	Scissors	Width
12VDC Ra90 IP67	HC-08500-S0440-A2090-A-15W/M	2000K	15	1086	60-70	25mm	8mm
	HC-08500-S0440-A2790-A-15W/M	2700K	15	1443	90-100	25mm	8mm
	HC-08500-S0440-A3090-A-15W/M	3000K	15	1520	90-100	25mm	8mm
	HC-08500-S0440-A4090-B-15W/M	4000K	15	1629	100-110	25mm	8mm
	HC-08500-S0440-A5090-C-15W/M	5000K	15	1784	110-120	25mm	8mm
	HC-08500-S0440-A6590-B-15W/M	6500K	15	1551	100-110	25mm	8mm
12VDC Ra90 IP67	HC-08500-S0820-A2090-A-15W/M	2000K	15	1086	60-70	50mm	8mm
	HC-08500-S0820-A2790-A-15W/M	2700K	15	1443	90-100	50mm	8mm
	HC-08500-S0820-A3090-A-15W/M	3000K	15	1520	90-100	50mm	8mm
	HC-08500-S0820-A4090-B-15W/M	4000K	15	1629	100-110	50mm	8mm
	HC-08500-S0820-A5090-C-15W/M	5000K	15	1784	110-120	50mm	8mm
	HC-08500-S0820-A6590-B-15W/M	6500K	15	1551	100-110	50mm	8mm


Remarks: Can be customized, product color, circuit board width, and the number of lamp beads customized.

Dimensions




Main Features

- COB high-density flexible soft light strip, soft light, folding resistance and bending resistance, no light spot.
- LED COB flexible light strip, flexible high-brightness self-adhesive line lamp without dark areas, COB high density, low pressure safety, high light transmittance, high luminous efficiency, no led graininess and dark areas

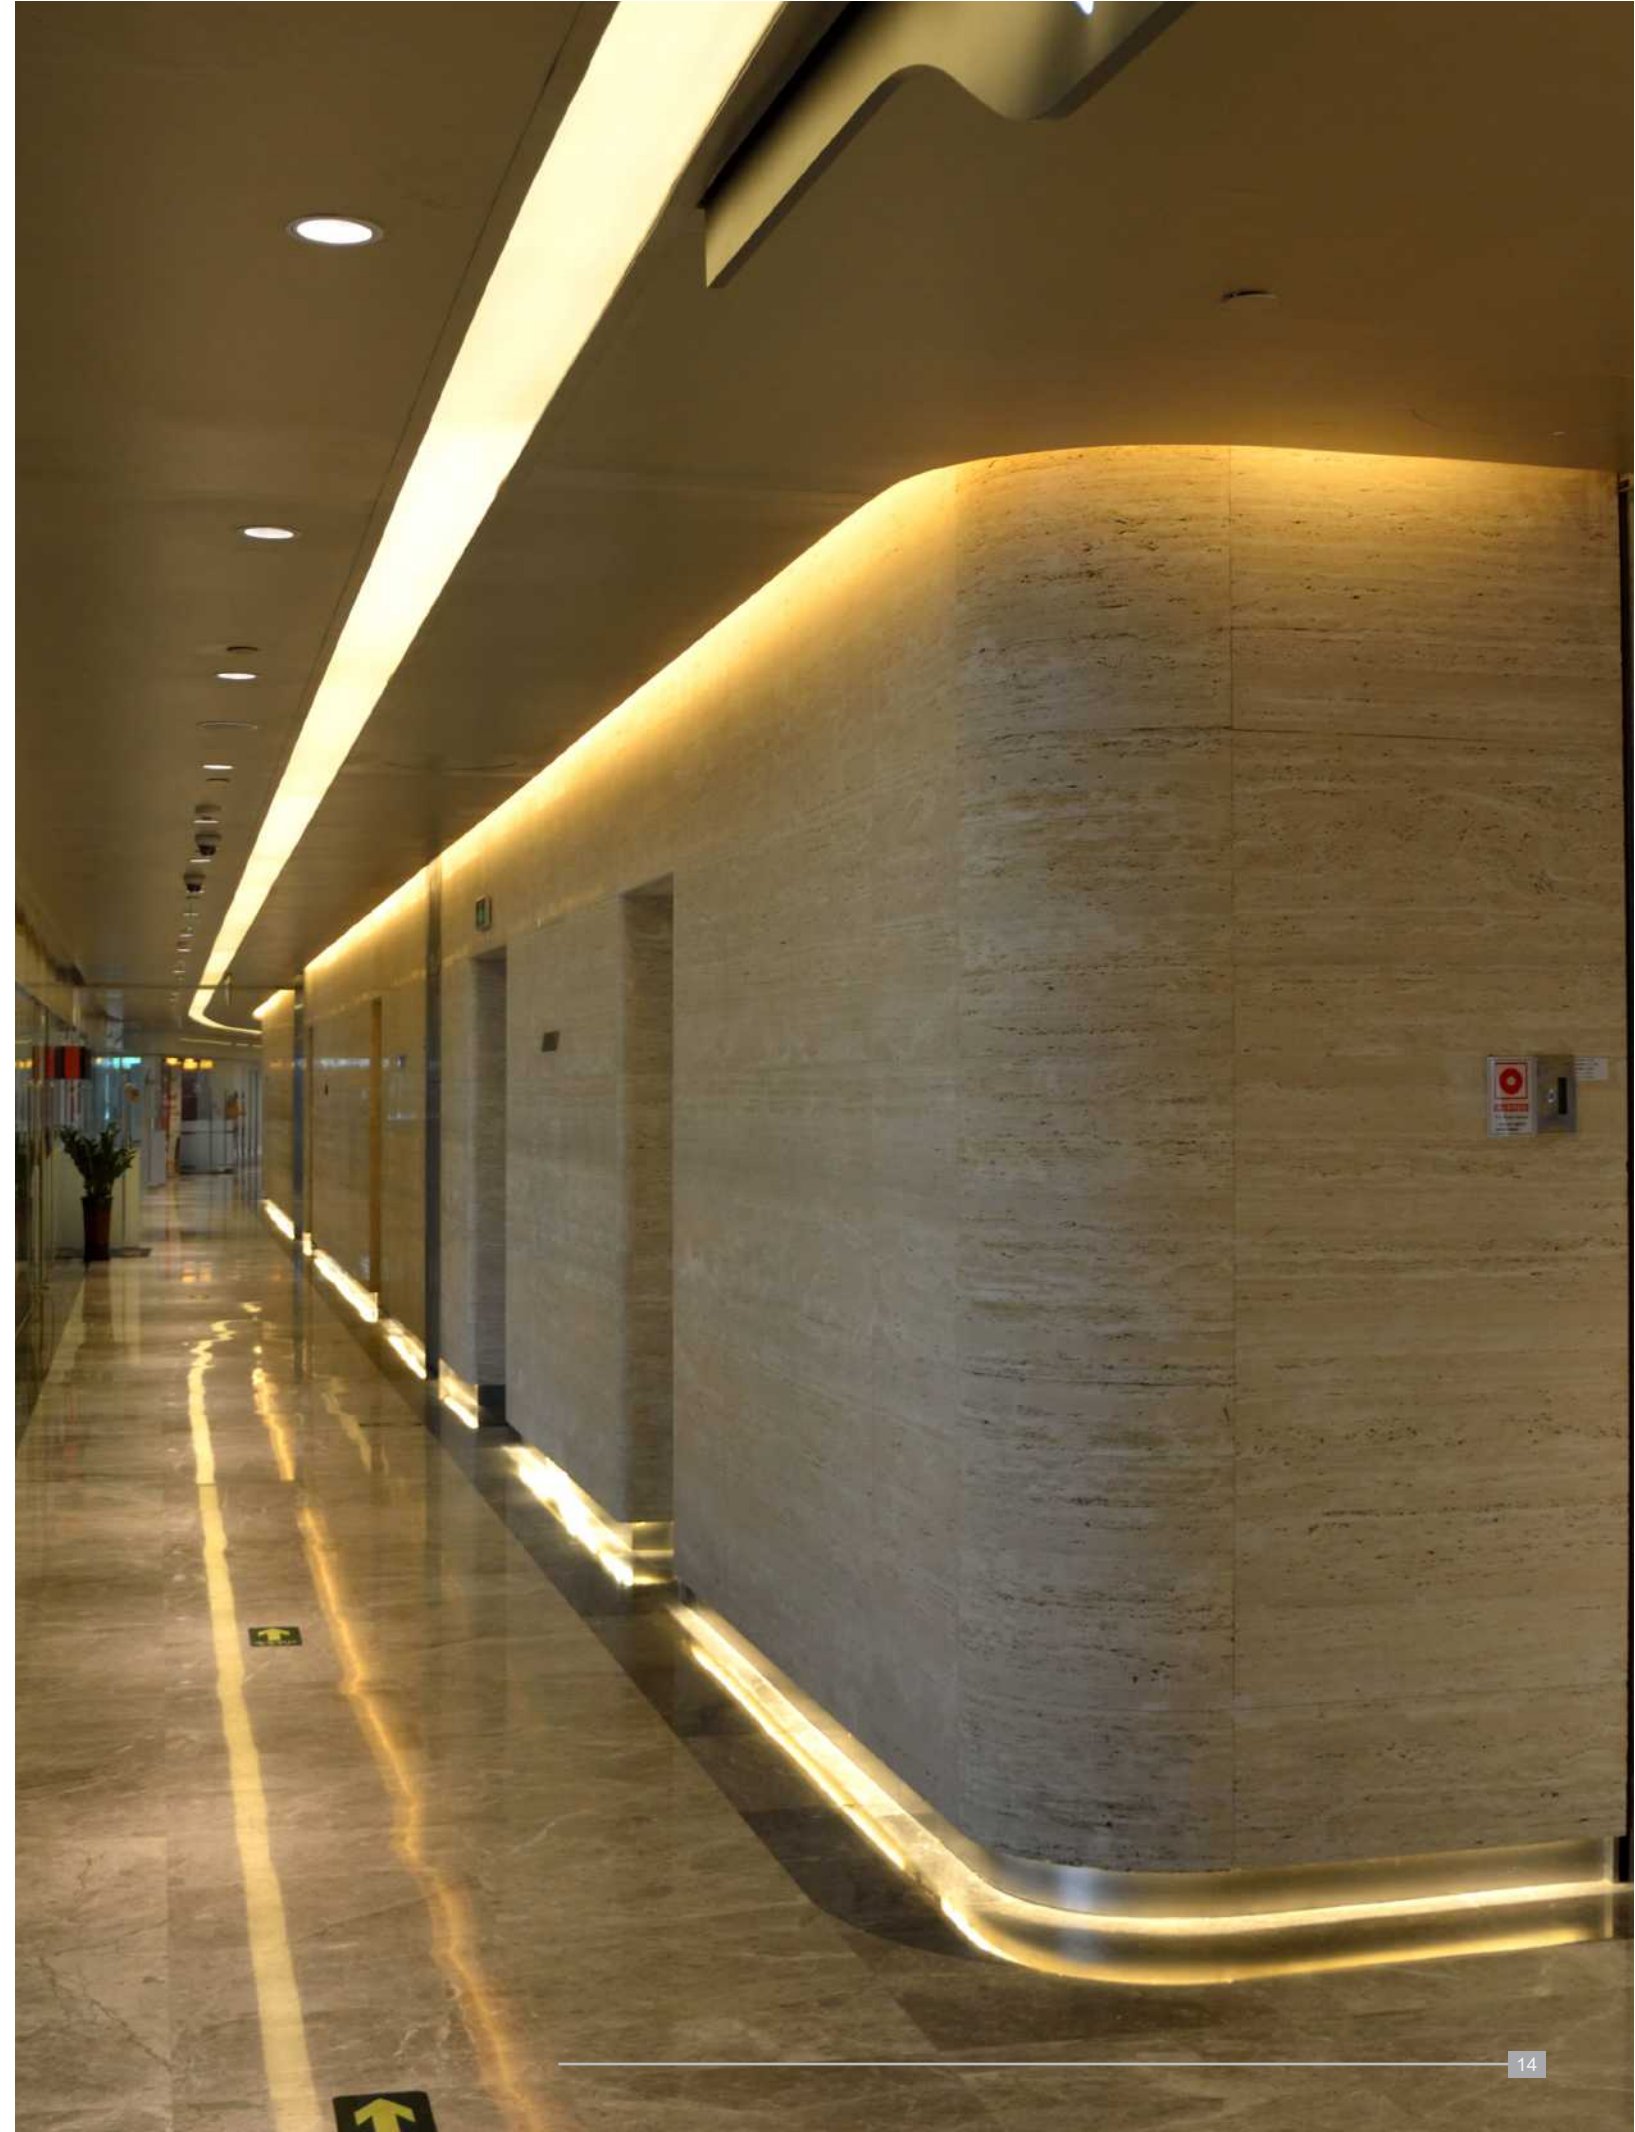

IP67-320


IP67-320 10MM

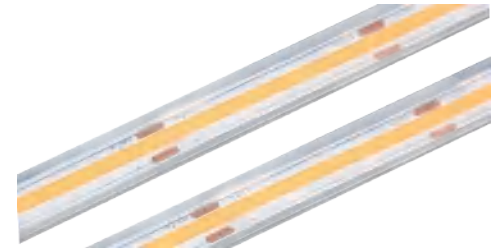


IP Rate



Beam Angle



Color Option



Voltage	Code	Color	Watts	Lumen	Efficiency	Width
12VDC Ra90 IP67	HC-10500-S0440-A2090-A-5W/M	2000K	5	404	70-80	10mm
	HC-10500-S0440-A2790-B-5W/M	2700K	5	511	100-110	10mm
	HC-10500-S0440-A3090-B-5W/M	3000K	5	565	100-110	10mm
	HC-10500-S0440-A4090-D-5W/M	4000K	5	619	120-130	10mm
	HC-10500-S0440-A5090-D-5W/M	5000K	5	673	120-130	10mm
	HC-10500-S0440-A6590-D-5W/M	6500K	5	592	120-130	10mm
24VDC Ra90 IP67	HC-10500-S0820-A2090-A-5W/M	2000K	5	404	70-80	10mm
	HC-10500-S0820-A2790-B-5W/M	2700K	5	511	100-110	10mm
	HC-10500-S0820-A3090-B-5W/M	3000K	5	565	100-110	10mm
	HC-10500-S0820-A4090-D-5W/M	4000K	5	619	120-130	10mm
	HC-10500-S0820-A5090-D-5W/M	5000K	5	673	120-130	10mm
	HC-10500-S0820-A6590-D-5W/M	6500K	5	592	120-130	10mm
12VDC Ra90 IP67	HC-10500-S0440-A2090-A-10W/M	2000K	10	799	70-80	10mm
	HC-10500-S0440-A2790-A-10W/M	2700K	10	1012	90-100	10mm
	HC-10500-S0440-A3090-B-10W/M	3000K	10	1118	100-110	10mm
	HC-10500-S0440-A4090-C-10W/M	4000K	10	1225	110-120	10mm
	HC-10500-S0440-A5090-D-10W/M	5000K	10	1331	120-130	10mm
	HC-10500-S0440-A6590-C-10W/M	6500K	10	1172	110-120	10mm
24VDC Ra90 IP67	HC-10500-S0820-A2090-A-10W/M	2000K	10	799	70-80	10mm
	HC-10500-S0820-A2790-A-10W/M	2700K	10	1012	90-100	10mm
	HC-10500-S0820-A3090-B-10W/M	3000K	10	1118	100-110	10mm
	HC-10500-S0820-A4090-C-10W/M	4000K	10	1225	110-120	10mm
	HC-10500-S0820-A5090-D-10W/M	5000K	10	1331	120-130	10mm
	HC-10500-S0820-A6590-C-10W/M	6500K	10	1172	110-120	10mm

IP67-320

Voltage	Code	Color	Watts	Lumen	Efficiency	Width
12VDC Ra90 IP67	HC-10500-S0440-A2090-A-15W/M	2000K	15	1108	60-70	10mm
	HC-10500-S0440-A2790-A-15W/M	2700K	15	1472	90-100	10mm
	HC-10500-S0440-A3090-A-15W/M	3000K	15	1551	90-100	10mm
	HC-10500-S0440-A4090-B-15W/M	4000K	15	1662	100-110	10mm
	HC-10500-S0440-A5090-C-15W/M	5000K	15	1820	110-120	10mm
	HC-10500-S0440-A6590-B-15W/M	6500K	15	1582	100-110	10mm
24VDC Ra90 IP67	HC-10500-S0820-A2090-A-15W/M	2000K	15	1108	60-70	10mm
	HC-10500-S0820-A2790-A-15W/M	2700K	15	1472	90-100	10mm
	HC-10500-S0820-A3090-A-15W/M	3000K	15	1551	90-100	10mm
	HC-10500-S0820-A4090-B-15W/M	4000K	15	1662	100-110	10mm
	HC-10500-S0820-A5090-C-15W/M	5000K	15	1820	110-120	10mm
	HC-10500-S0820-A6590-B-15W/M	6500K	15	1582	100-110	10mm

Remarks: Can be customized, product color, circuit board width, and the number of lamp beads customized.

Dimensions



Main Features

- COB high-density flexible soft light strip, soft light, folding resistance and bending resistance, no light spot.
- LED COB flexible light strip, flexible high-brightness self-adhesive line lamp without dark areas, COB high density, low pressure safety, high light transmittance, high luminous efficiency, no led graininess and dark areas



IP20-480


IP20-480 4MM




IP Rate



Beam Angle



Color Option



Voltage	Code	Color	Watts	Lumen	Efficiency	Scissors	Width
12VDC Ra90 IP20	HC-04500-S0460-A2090-A-5W/M	2000K	5	431	80-90	25mm	4mm
	HC-04500-S0460-A2790-B-5W/M	2700K	5	532	100-110	25mm	4mm
	HC-04500-S0460-A3090-C-5W/M	3000K	5	583	110-120	25mm	4mm
	HC-04500-S0460-A4090-D-5W/M	4000K	5	634	120-130	25mm	4mm
	HC-04500-S0460-A5090-E-5W/M	5000K	5	684	130-140	25mm	4mm
	HC-04500-S0460-A6590-D-5W/M	6500K	5	608	120-130	25mm	4mm
24VDC Ra90 IP20	HC-04500-S0830-A2090-A-5W/M	2000K	5	431	80-90	50mm	4mm
	HC-04500-S0830-A2790-B-5W/M	2700K	5	532	100-110	50mm	4mm
	HC-04500-S0830-A3090-C-5W/M	3000K	5	583	110-120	50mm	4mm
	HC-04500-S0830-A4090-D-5W/M	4000K	5	634	120-130	50mm	4mm
	HC-04500-S0830-A5090-E-5W/M	5000K	5	684	130-140	50mm	4mm
	HC-04500-S0830-A6590-D-5W/M	6500K	5	608	120-130	50mm	4mm

Remarks: Can be customized, product color, circuit board width, and the number of lamp beads customized.

Dimensions



Main Features

- COB high-density flexible soft light strip, soft light, folding resistance and bending resistance, no light spot.
- LED COB flexible light strip, flexible high-brightness self-adhesive line lamp without dark areas, COB high density, low pressure safety, high light transmittance, high luminous efficiency, no led graininess and dark areas

IP20-480


IP20-480 8MM




IP Rate



Beam Angle



Color Option



Voltage	Code	Color	Watts	Lumen	Efficiency	Scissors	Width
12VDC Ra90 IP20	HC-08500-S0460-A2090-A-5W/M	2000K	5	440	80-90	25mm	8mm
	HC-08500-S0460-A2790-C-5W/M	2700K	5	543	110-120	25mm	8mm
	HC-08500-S0460-A3090-C-5W/M	3000K	5	595	110-120	25mm	8mm
	HC-08500-S0460-A4090-E-5W/M	4000K	5	646	130-140	25mm	8mm
	HC-08500-S0460-A5090-E-5W/M	5000K	5	698	130-140	25mm	8mm
	HC-08500-S0460-A6590-E-5W/M	6500K	5	621	130-140	25mm	8mm
24VDC Ra90 IP20	HC-08500-S0830-A2090-A-5W/M	2000K	5	440	80-90	50mm	8mm
	HC-08500-S0830-A2790-C-5W/M	2700K	5	543	110-120	50mm	8mm
	HC-08500-S0830-A3090-C-5W/M	3000K	5	595	110-120	50mm	8mm
	HC-08500-S0830-A4090-E-5W/M	4000K	5	646	130-140	50mm	8mm
	HC-08500-S0830-A5090-E-5W/M	5000K	5	698	130-140	50mm	8mm
	HC-08500-S0830-A6590-E-5W/M	6500K	5	621	130-140	50mm	8mm
12VDC Ra90 IP20	HC-08500-S0460-A2090-A-10W/M	2000K	10	870	80-90	25mm	8mm
	HC-08500-S0460-A2790-B-10W/M	2700K	10	1075	100-110	25mm	8mm
	HC-08500-S0460-A3090-C-10W/M	3000K	10	1177	110-120	25mm	8mm
	HC-08500-S0460-A4090-D-10W/M	4000K	10	1280	120-130	25mm	8mm
	HC-08500-S0460-A5090-E-10W/M	5000K	10	1382	130-140	25mm	8mm
	HC-08500-S0460-A6590-D-10W/M	6500K	10	1229	120-130	25mm	8mm
24VDC Ra90 IP20	HC-08500-S0830-A2090-A-10W/M	2000K	10	870	80-90	50mm	8mm
	HC-08500-S0830-A2790-B-10W/M	2700K	10	1075	100-110	50mm	8mm
	HC-08500-S0830-A3090-C-10W/M	3000K	10	1177	110-120	50mm	8mm
	HC-08500-S0830-A4090-D-10W/M	4000K	10	1280	120-130	50mm	8mm
	HC-08500-S0830-A5090-E-10W/M	5000K	10	1382	130-140	50mm	8mm
	HC-08500-S0830-A6590-D-10W/M	6500K	10	1229	120-130	50mm	8mm

IP20-480

Voltage	Code	Color	Watts	Lumen	Efficiency	Scissors	Width
12VDC Ra90 IP20	HC-08500-S0460-A2090-A-15W/M	2000K	15	1141	70-80	25mm	8mm
	HC-08500-S0460-A2790-A-15W/M	2700K	15	1445	90-100	25mm	8mm
	HC-08500-S0460-A3090-B-15W/M	3000K	15	1597	100-110	25mm	8mm
	HC-08500-S0460-A4090-C-15W/M	4000K	15	1749	110-120	25mm	8mm
	HC-08500-S0460-A5090-D-15W/M	5000K	15	1901	120-130	25mm	8mm
	HC-08500-S0460-A6590-C-15W/M	6500K	15	1673	110-120	25mm	8mm
24VDC Ra90 IP20	HC-08500-S0830-A2090-A-15W/M	2000K	15	1141	70-80	50mm	8mm
	HC-08500-S0830-A2790-A-15W/M	2700K	15	1445	90-100	50mm	8mm
	HC-08500-S0830-A3090-B-15W/M	3000K	15	1597	100-110	50mm	8mm
	HC-08500-S0830-A4090-C-15W/M	4000K	15	1749	110-120	50mm	8mm
	HC-08500-S0830-A5090-D-15W/M	5000K	15	1901	120-130	50mm	8mm
	HC-08500-S0830-A6590-C-15W/M	6500K	15	1673	110-120	50mm	8mm

Remarks: Can be customized, product color, circuit board width, and the number of lamp beads customized.

Dimensions



Main Features

- COB high-density flexible soft light strip, soft light, folding resistance and bending resistance, no light spot.
- LED COB flexible light strip, flexible high-brightness self-adhesive line lamp without dark areas, COB high density, low pressure safety, high light transmittance, high luminous efficiency, no led graininess and dark areas

IP20-480


IP20-480 10MM




IP Rate



Beam Angle



Color Option



Voltage	Code	Color	Watts	Lumen	Efficiency	Scissors	Width
12VDC Ra90 IP20	HC-10500-S0460-A2090-A-5W/M	2000K	5	448	80-90	25mm	10mm
	HC-10500-S0460-A2790-C-5W/M	2700K	5	554	110-120	25mm	10mm
	HC-10500-S0460-A3090-C-5W/M	3000K	5	607	110-120	25mm	10mm
	HC-10500-S0460-A4090-E-5W/M	4000K	5	659	130-140	25mm	10mm
	HC-10500-S0460-A5090-E-5W/M	5000K	5	712	130-140	25mm	10mm
	HC-10500-S0460-A6590-E-5W/M	6500K	5	633	130-140	25mm	10mm
24VDC Ra90 IP20	HC-10500-S0830-A2090-A-5W/M	2000K	5	448	80-90	50mm	10mm
	HC-10500-S0830-A2790-C-5W/M	2700K	5	554	110-120	50mm	10mm
	HC-10500-S0830-A3090-C-5W/M	3000K	5	607	110-120	50mm	10mm
	HC-10500-S0830-A4090-E-5W/M	4000K	5	659	130-140	50mm	10mm
	HC-10500-S0830-A5090-E-5W/M	5000K	5	712	130-140	50mm	10mm
	HC-10500-S0830-A6590-E-5W/M	6500K	5	633	130-140	50mm	10mm
12VDC Ra90 IP20	HC-10500-S0460-A2090-A-10W/M	2000K	10	888	80-90	25mm	10mm
	HC-10500-S0460-A2790-B-10W/M	2700K	10	1096	100-110	25mm	10mm
	HC-10500-S0460-A3090-C-10W/M	3000K	10	1201	110-120	25mm	10mm
	HC-10500-S0460-A4090-D-10W/M	4000K	10	1305	120-130	25mm	10mm
	HC-10500-S0460-A5090-E-10W/M	5000K	10	1410	130-140	25mm	10mm
	HC-10500-S0460-A6590-D-10W/M	6500K	10	1253	120-130	25mm	10mm
24VDC Ra90 IP20	HC-10500-S0830-A2090-A-10W/M	2000K	10	888	80-90	50mm	10mm
	HC-10500-S0830-A2790-B-10W/M	2700K	10	1096	100-110	50mm	10mm
	HC-10500-S0830-A3090-C-10W/M	3000K	10	1201	110-120	50mm	10mm
	HC-10500-S0830-A4090-D-10W/M	4000K	10	1305	120-130	50mm	10mm
	HC-10500-S0830-A5090-E-10W/M	5000K	10	1410	130-140	50mm	10mm
	HC-10500-S0830-A6590-D-10W/M	6500K	10	1253	120-130	50mm	10mm

IP20-480

Voltage	Code	Color	Watts	Lumen	Efficiency	Scissors	Width
12VDC Ra90 IP20	HC-10500-S0460-A2090-A-15W/M	2000K	15	1164	70-80	25mm	10mm
	HC-10500-S0460-A2790-A-15W/M	2700K	15	1474	90-100	25mm	10mm
	HC-10500-S0460-A3090-B-15W/M	3000K	15	1629	100-110	25mm	10mm
	HC-10500-S0460-A4090-C-15W/M	4000K	15	1784	110-120	25mm	10mm
	HC-10500-S0460-A5090-D-15W/M	5000K	15	1939	120-130	25mm	10mm
	HC-10500-S0460-A6590-C-15W/M	6500K	15	1707	110-120	25mm	10mm
24VDC Ra90 IP20	HC-10500-S0830-A2090-A-15W/M	2000K	15	1164	70-80	50mm	10mm
	HC-10500-S0830-A2790-A-15W/M	2700K	15	1474	90-100	50mm	10mm
	HC-10500-S0830-A3090-B-15W/M	3000K	15	1629	100-110	50mm	10mm
	HC-10500-S0830-A4090-C-15W/M	4000K	15	1784	110-120	50mm	10mm
	HC-10500-S0830-A5090-D-15W/M	5000K	15	1939	120-130	50mm	10mm
	HC-10500-S0830-A6590-C-15W/M	6500K	15	1707	110-120	50mm	10mm

Remarks: Can be customized, product color, circuit board width, and the number of lamp beads customized.

Dimensions



Main Features

- COB high-density flexible soft light strip, soft light, folding resistance and bending resistance, no light spot.
- LED COB flexible light strip, flexible high-brightness self-adhesive line lamp without dark areas, COB high density, low pressure safety, high light transmittance, high luminous efficiency, no led graininess and dark areas



IP67-480


IP67-480 4MM




IP Rate



Beam Angle



Color Option



Voltage	Code	Color	Watts	Lumen	Efficiency	Width
12VDC Ra90 IP67	HC-04500-S0460-A2090-A-5W/M	2000K	5	440	80-90	4mm
	HC-04500-S0460-A2790-B-5W/M	2700K	5	543	100-110	4mm
	HC-04500-S0460-A3090-C-5W/M	3000K	5	595	110-120	4mm
	HC-04500-S0460-A4090-D-5W/M	4000K	5	646	120-130	4mm
	HC-04500-S0460-A5090-E-5W/M	5000K	5	698	130-140	4mm
	HC-04500-S0460-A6590-D-5W/M	6500K	5	621	120-130	4mm
24VDC Ra90 IP67	HC-04500-S0830-A2090-A-5W/M	2000K	5	440	80-90	4mm
	HC-04500-S0830-A2790-B-5W/M	2700K	5	543	100-110	4mm
	HC-04500-S0830-A3090-C-5W/M	3000K	5	595	110-120	4mm
	HC-04500-S0830-A4090-D-5W/M	4000K	5	646	120-130	4mm
	HC-04500-S0830-A5090-E-5W/M	5000K	5	698	130-140	4mm
	HC-04500-S0830-A6590-D-5W/M	6500K	5	621	120-130	4mm

Remarks: Can be customized, product color, circuit board width, and the number of lamp beads customized.

Dimensions




Main Features

- COB high-density flexible soft light strip, soft light, folding resistance and bending resistance, no light spot.
- LED COB flexible light strip, flexible high-brightness self-adhesive line lamp without dark areas, COB high density, low pressure safety, high light transmittance, high luminous efficiency, no led graininess and dark areas

IP67-480


IP67-480 8MM

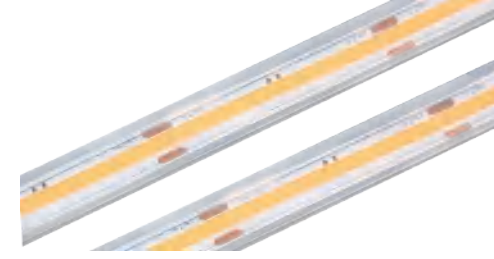


IP Rate



Beam Angle



Color Option



Voltage	Code	Color	Watts	Lumen	Efficiency	Width
12VDC Ra90 IP67	HC-08500-S0460-A2090-A-5W/M	2000K	5	448	80-90	8mm
	HC-08500-S0460-A2790-C-5W/M	2700K	5	554	110-120	8mm
	HC-08500-S0460-A3090-C-5W/M	3000K	5	607	110-120	8mm
	HC-08500-S0460-A4090-E-5W/M	4000K	5	659	130-140	8mm
	HC-08500-S0460-A5090-E-5W/M	5000K	5	712	130-140	8mm
	HC-08500-S0460-A6590-E-5W/M	6500K	5	633	130-140	8mm
24VDC Ra90 IP67	HC-08500-S0830-A2090-A-5W/M	2000K	5	448	80-90	8mm
	HC-08500-S0830-A2790-C-5W/M	2700K	5	554	110-120	8mm
	HC-08500-S0830-A3090-C-5W/M	3000K	5	607	110-120	8mm
	HC-08500-S0830-A4090-E-5W/M	4000K	5	659	130-140	8mm
	HC-08500-S0830-A5090-E-5W/M	5000K	5	712	130-140	8mm
	HC-08500-S0830-A6590-E-5W/M	6500K	5	633	130-140	8mm
12VDC Ra90 IP67	HC-08500-S0460-A2090-A-10W/M	2000K	10	888	80-90	8mm
	HC-08500-S0460-A2790-B-10W/M	2700K	10	1096	100-110	8mm
	HC-08500-S0460-A3090-C-10W/M	3000K	10	1201	110-120	8mm
	HC-08500-S0460-A4090-D-10W/M	4000K	10	1305	120-130	8mm
	HC-08500-S0460-A5090-E-10W/M	5000K	10	1410	130-140	8mm
	HC-08500-S0460-A6590-D-10W/M	6500K	10	1253	120-130	8mm
24VDC Ra90 IP67	HC-08500-S0830-A2090-A-10W/M	2000K	10	888	80-90	8mm
	HC-08500-S0830-A2790-B-10W/M	2700K	10	1096	100-110	8mm
	HC-08500-S0830-A3090-C-10W/M	3000K	10	1201	110-120	8mm
	HC-08500-S0830-A4090-D-10W/M	4000K	10	1305	120-130	8mm
	HC-08500-S0830-A5090-E-10W/M	5000K	10	1410	130-140	8mm
	HC-08500-S0830-A6590-D-10W/M	6500K	10	1253	120-130	8mm

Voltage	Code	Color	Watts	Lumen	Efficiency	Width
12VDC Ra90 IP67	HC-08500-S0460-A2090-A-15W/M	2000K	15	1164	70-80	8mm
	HC-08500-S0460-A2790-A-15W/M	2700K	15	1474	90-100	8mm
	HC-08500-S0460-A3090-B-15W/M	3000K	15	1629	100-110	8mm
	HC-08500-S0460-A4090-C-15W/M	4000K	15	1784	110-120	8mm
	HC-08500-S0460-A5090-D-15W/M	5000K	15	1939	120-130	8mm
	HC-08500-S0460-A6590-C-15W/M	6500K	15	1707	110-120	8mm
24VDC Ra90 IP67	HC-08500-S0830-A2090-A-15W/M	2000K	15	1164	70-80	8mm
	HC-08500-S0830-A2790-A-15W/M	2700K	15	1474	90-100	8mm
	HC-08500-S0830-A3090-B-15W/M	3000K	15	1629	100-110	8mm
	HC-08500-S0830-A4090-C-15W/M	4000K	15	1784	110-120	8mm
	HC-08500-S0830-A5090-D-15W/M	5000K	15	1939	120-130	8mm
	HC-08500-S0830-A6590-C-15W/M	6500K	15	1707	110-120	8mm

Remarks: Can be customized, product color, circuit board width, and the number of lamp beads customized.

Dimensions



Main Features

- COB high-density flexible soft light strip, soft light, folding resistance and bending resistance, no light spot.
- LED COB flexible light strip, flexible high-brightness self-adhesive line lamp without dark areas, COB high density, low pressure safety, high light transmittance, high luminous efficiency, no led graininess and dark areas

IP67-480


IP67-480 10MM




IP Rate



Beam Angle



Color Option



Voltage	Code	Color	Watts	Lumen	Efficiency	Width
12VDC Ra90 IP67	HC-10500-S0460-A2090-A-5W/M	2000K	5	457	80-90	10mm
	HC-10500-S0460-A2790-C-5W/M	2700K	5	565	110-120	10mm
	HC-10500-S0460-A3090-C-5W/M	3000K	5	619	110-120	10mm
	HC-10500-S0460-A4090-E-5W/M	4000K	5	673	130-140	10mm
	HC-10500-S0460-A5090-E-5W/M	5000K	5	726	130-140	10mm
	HC-10500-S0460-A6590-E-5W/M	6500K	5	646	130-140	10mm
24VDC Ra90 IP67	HC-10500-S0830-A2090-A-5W/M	2000K	5	457	80-90	10mm
	HC-10500-S0830-A2790-C-5W/M	2700K	5	565	110-120	10mm
	HC-10500-S0830-A3090-C-5W/M	3000K	5	619	110-120	10mm
	HC-10500-S0830-A4090-E-5W/M	4000K	5	673	130-140	10mm
	HC-10500-S0830-A5090-E-5W/M	5000K	5	726	130-140	10mm
	HC-10500-S0830-A6590-E-5W/M	6500K	5	646	130-140	10mm
12VDC Ra90 IP67	HC-10500-S0460-A2090-A-10W/M	2000K	10	905	80-90	10mm
	HC-10500-S0460-A2790-B-10W/M	2700K	10	1118	100-110	10mm
	HC-10500-S0460-A3090-C-10W/M	3000K	10	1225	110-120	10mm
	HC-10500-S0460-A4090-D-10W/M	4000K	10	1331	120-130	10mm
	HC-10500-S0460-A5090-E-10W/M	5000K	10	1438	130-140	10mm
	HC-10500-S0460-A6590-D-10W/M	6500K	10	1278	120-130	10mm
24VDC Ra90 IP67	HC-10500-S0830-A2090-A-10W/M	2000K	10	905	80-90	10mm
	HC-10500-S0830-A2790-B-10W/M	2700K	10	1118	100-110	10mm
	HC-10500-S0830-A3090-C-10W/M	3000K	10	1225	110-120	10mm
	HC-10500-S0830-A4090-D-10W/M	4000K	10	1331	120-130	10mm
	HC-10500-S0830-A5090-E-10W/M	5000K	10	1438	130-140	10mm
	HC-10500-S0830-A6590-D-10W/M	6500K	10	1278	120-130	10mm

IP67-480

Voltage	Code	Color	Watts	Lumen	Efficiency	Width
12VDC Ra90 IP67	HC-10500-S0460-A2090-A-15W/M	2000K	15	1187	70-80	10mm
	HC-10500-S0460-A2790-A-15W/M	2700K	15	1503	90-100	10mm
	HC-10500-S0460-A3090-B-15W/M	3000K	15	1662	100-110	10mm
	HC-10500-S0460-A4090-C-15W/M	4000K	15	1820	110-120	10mm
	HC-10500-S0460-A5090-D-15W/M	5000K	15	1978	120-130	10mm
	HC-10500-S0460-A6590-C-15W/M	6500K	15	1741	110-120	10mm
24VDC Ra90	HC-10500-S0830-A2090-A-15W/M	2000K	15	1187	70-80	10mm
	HC-10500-S0830-A2790-A-15W/M	2700K	15	1503	90-100	10mm
	HC-10500-S0830-A3090-B-15W/M	3000K	15	1662	100-110	10mm
	HC-10500-S0830-A4090-C-15W/M	4000K	15	1820	110-120	10mm
	HC-10500-S0830-A5090-D-15W/M	5000K	15	1978	120-130	10mm
	HC-10500-S0830-A6590-C-15W/M	6500K	15	1741	110-120	10mm


Remarks: Can be customized, product color, circuit board width, and the number of lamp beads customized.

Dimensions



Main Features

- COB high-density flexible soft light strip, soft light, folding resistance and bending resistance, no light spot.
- LED COB flexible light strip, flexible high-brightness self-adhesive line lamp without dark areas, COB high density, low pressure safety, high light transmittance, high luminous efficiency, no led graininess and dark areas

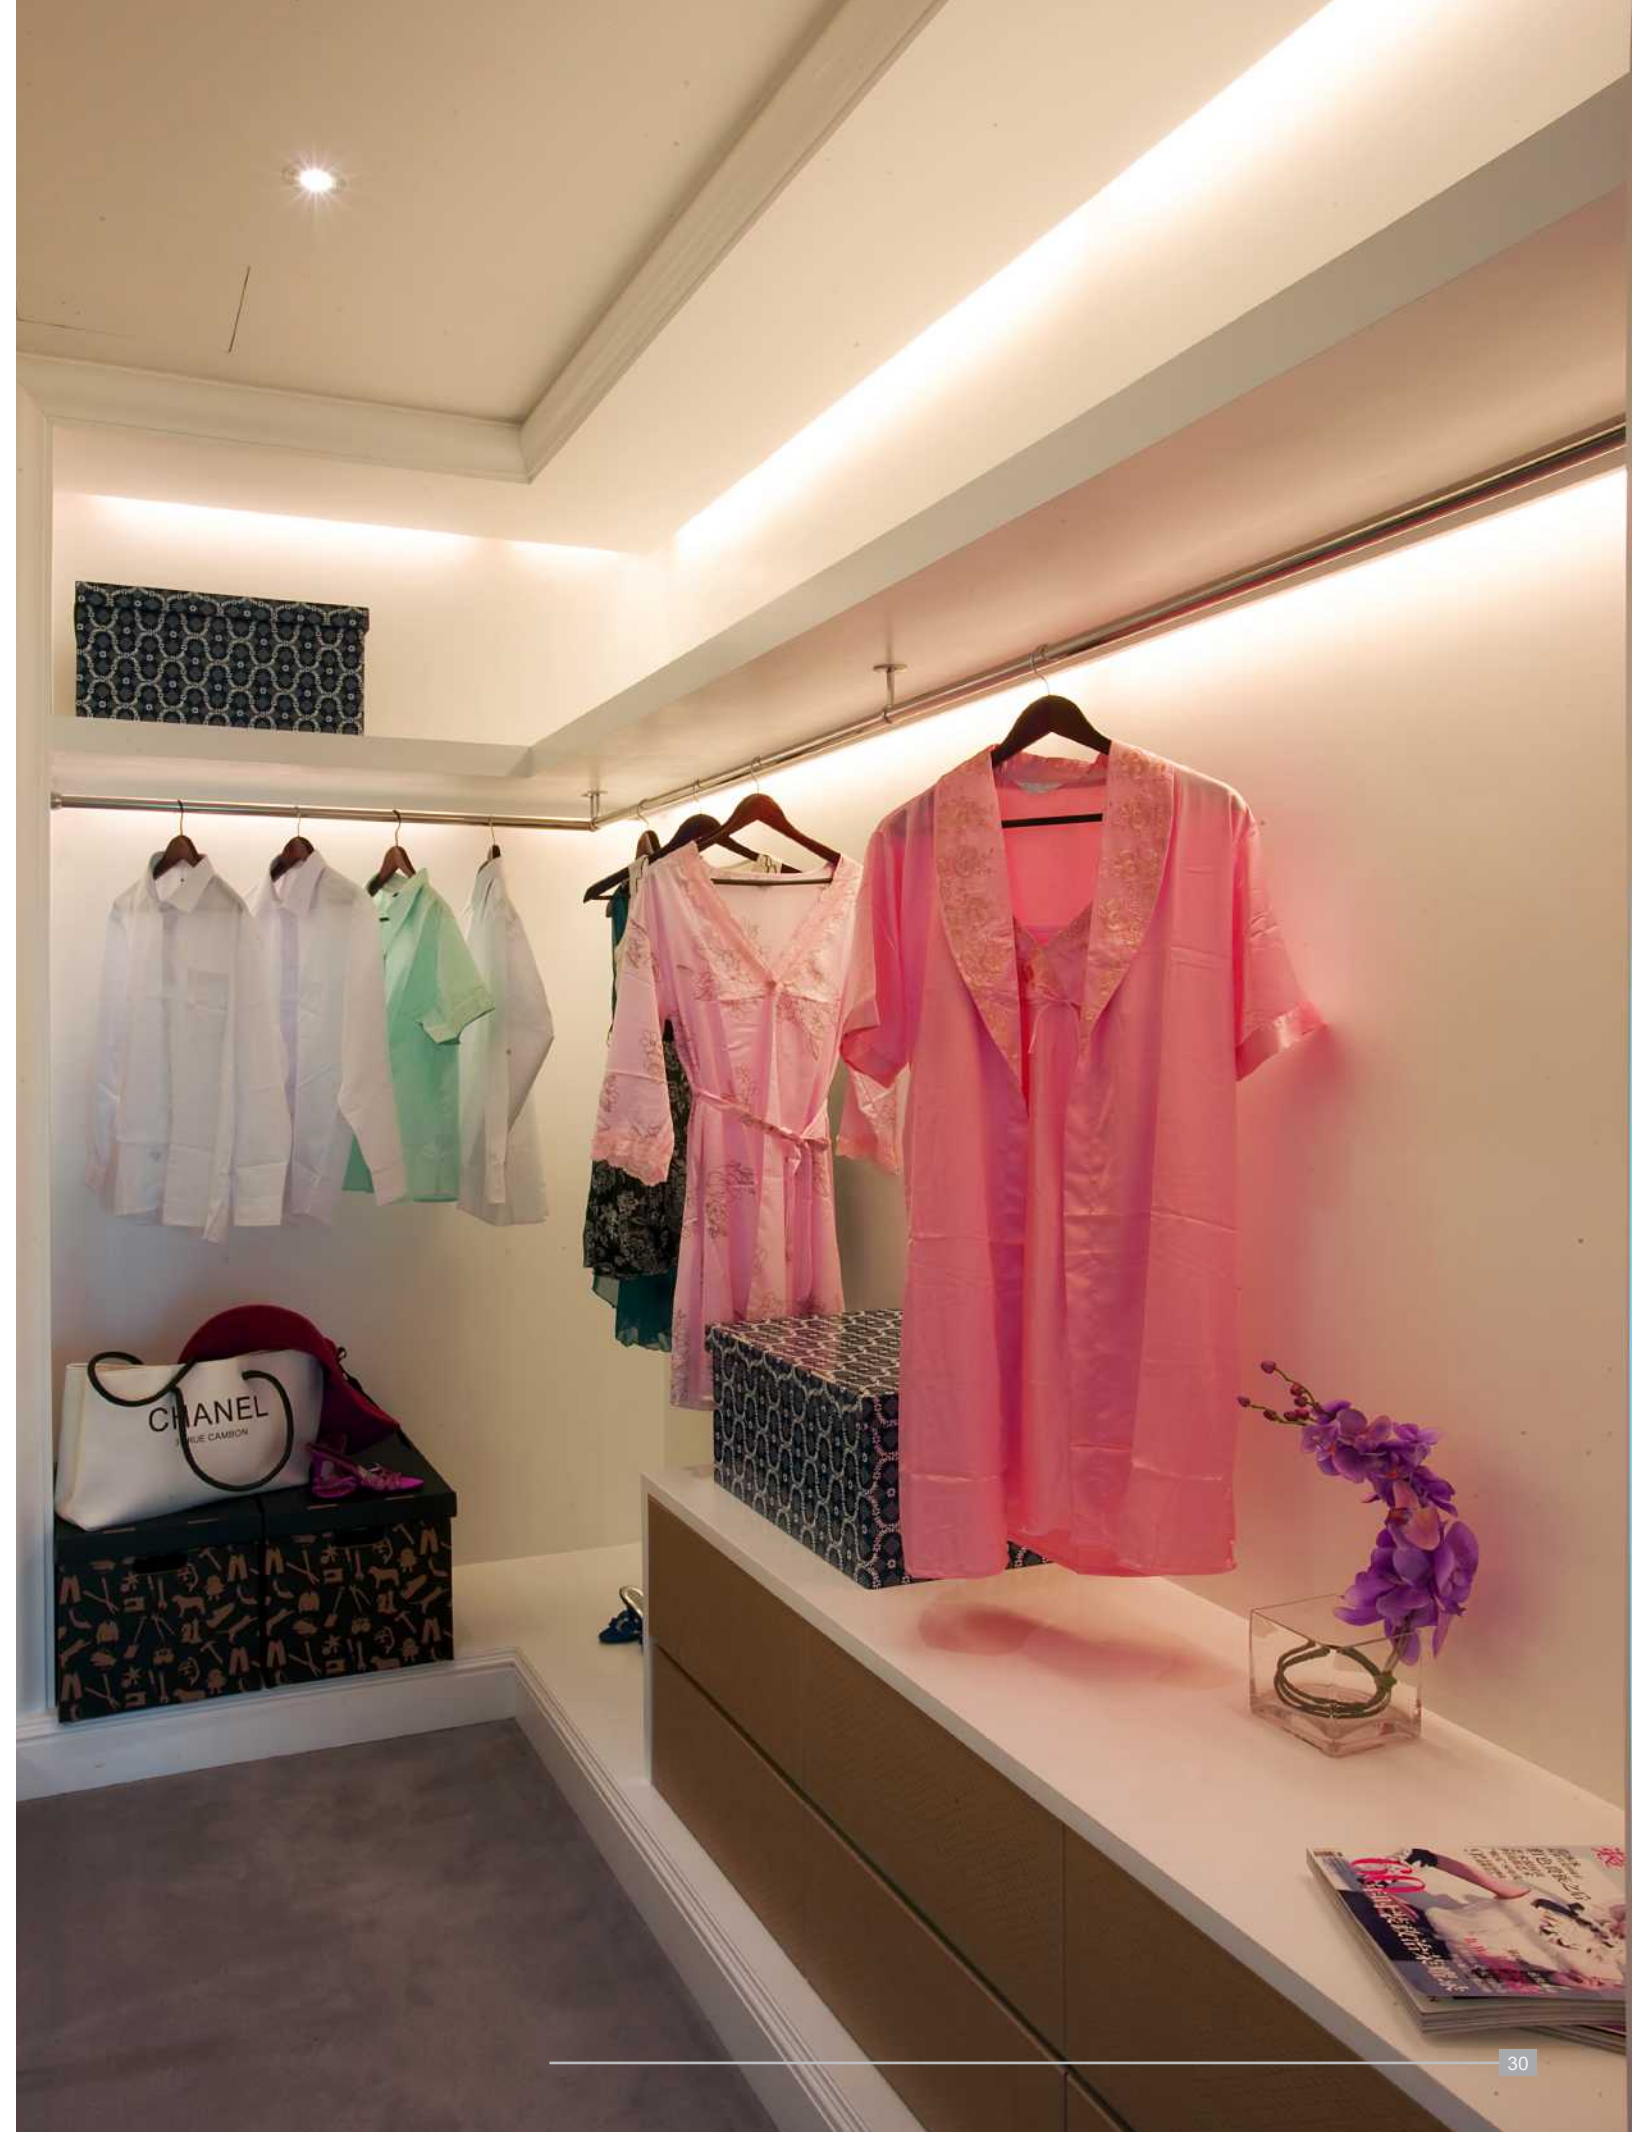


RGB




IP Rate



Beam Angle



Color Option



Voltage	Code	Color	Watts	Lumen	Efficiency	Scissors	Width
24VDC Ra90	HC-12500-S0836-RGB-E-15W/10W/10W/M	R	15	538	30-40	41.67	10mm
		G	10	1383	130-140	41.67	
		B	10	255	20-30	41.67	

Remarks: Can be customized, product color, circuit board width, and the number of lamp beads customized.

Dimensions



Main Features

- COB high-density flexible soft light strip, soft light, folding resistance and bending resistance, no light spot.
- LED COB flexible light strip, flexible high-brightness self-adhesive line lamp without dark areas, COB high density, low pressure safety, high light transmittance, high luminous efficiency, no led graininess and dark areas


Double color temperature




IP Rate



Beam Angle



Color Option



Voltage	Code	Color	Watts	Lumen	Efficiency	Scissors	Width
24VDC Ra90	HC-12500-S0836-A276590-C-10W/10W/M	2700K	10	1075	100-110	27.78	10mm
		6500K	10	1177	110-120	27.78	

Remarks: Can be customized, product color, circuit board width, and the number of lamp beads customized.

Dimensions





Main Features

- COB high-density flexible soft light strip, soft light, folding resistance and bending resistance, no light spot.
- LED COB flexible light strip, flexible high-brightness self-adhesive line lamp without dark areas, COB high density, low pressure safety, high light transmittance, high luminous efficiency, no led graininess and dark areas

Colorful cob strip


Colorful cob strip 4MM/8MM/10MM

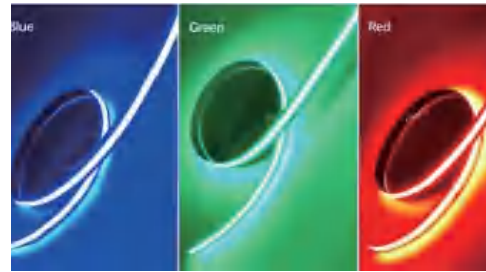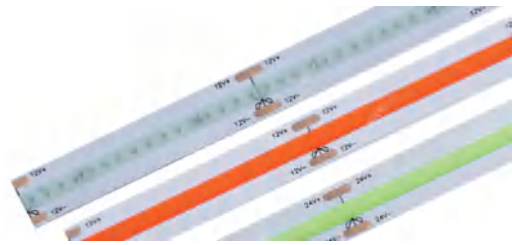


IP Rate



Beam Angle



Color Option



Voltage	Code	Color	Watts	Lumen	Efficiency	Scissors	Width
12VDC IP20	HC-04500-S0440-R-A-5W/M	Red	5	213	40-50	25mm	4mm/8mm/10mm
	HC-04500-S0440-B-A-5W/M	Blue	5	106	20-30	25mm	4mm/8mm/10mm
	HC-04500-S0440-G-E-5W/M	Green	5	664	130-140	25mm	4mm/8mm/10mm
	HC-04500-S0440-IB-C-5W/M	Ice Blue	5	558	110-120	25mm	4mm/8mm/10mm
	HC-04500-S0440-P-A-5W/M	Pink	5	411	80-90	25mm	4mm/8mm/10mm
	HC-04500-S0440-Y-A-5W/M	Yellow	5	360	70-80	25mm	4mm/8mm/10mm
	HC-04500-S0440-P-A-5W/M	Purple	5	177	30-40	25mm	4mm/8mm/10mm
24VDC IP20	HC-04500-S0820-R-A-5W/M	Red	5	213	40-50	50mm	4mm/8mm/10mm
	HC-04500-S0820-B-A-5W/M	Blue	5	106	20-30	50mm	4mm/8mm/10mm
	HC-04500-S0820-G-E-5W/M	Green	5	664	130-140	50mm	4mm/8mm/10mm
	HC-04500-S0820-IB-C-5W/M	Ice Blue	5	558	110-120	50mm	4mm/8mm/10mm
	HC-04500-S0820-P-A-5W/M	Pink	5	411	80-90	50mm	4mm/8mm/10mm
	HC-04500-S0820-Y-A-5W/M	Yellow	5	360	70-80	50mm	4mm/8mm/10mm
	HC-04500-S0820-P-A-5W/M	Purple	5	177	30-40	50mm	4mm/8mm/10mm

Remarks: Can be customized, product color, circuit board width, and the number of lamp beads customized.

Dimensions



Main Features

- COB high-density flexible soft light strip, soft light, folding resistance and bending resistance, no light spot.
- LED COB flexible light strip, flexible high-brightness self-adhesive line lamp without dark areas, COB high density, low pressure safety, high light transmittance, high luminous efficiency, no led graininess and dark areas

Colorful cob strip

