


- ▶ Transparent small circuit breaker series
- ▶ Clear plastic shell circuit breaker series
- ▶ Transparent electric leakage circuit breaker series
- ▶ Transparent electricity meter box series
- ▶ High and low voltage electrical complete equipment
- ▶ box substation



Sets Series

Complete electrical series

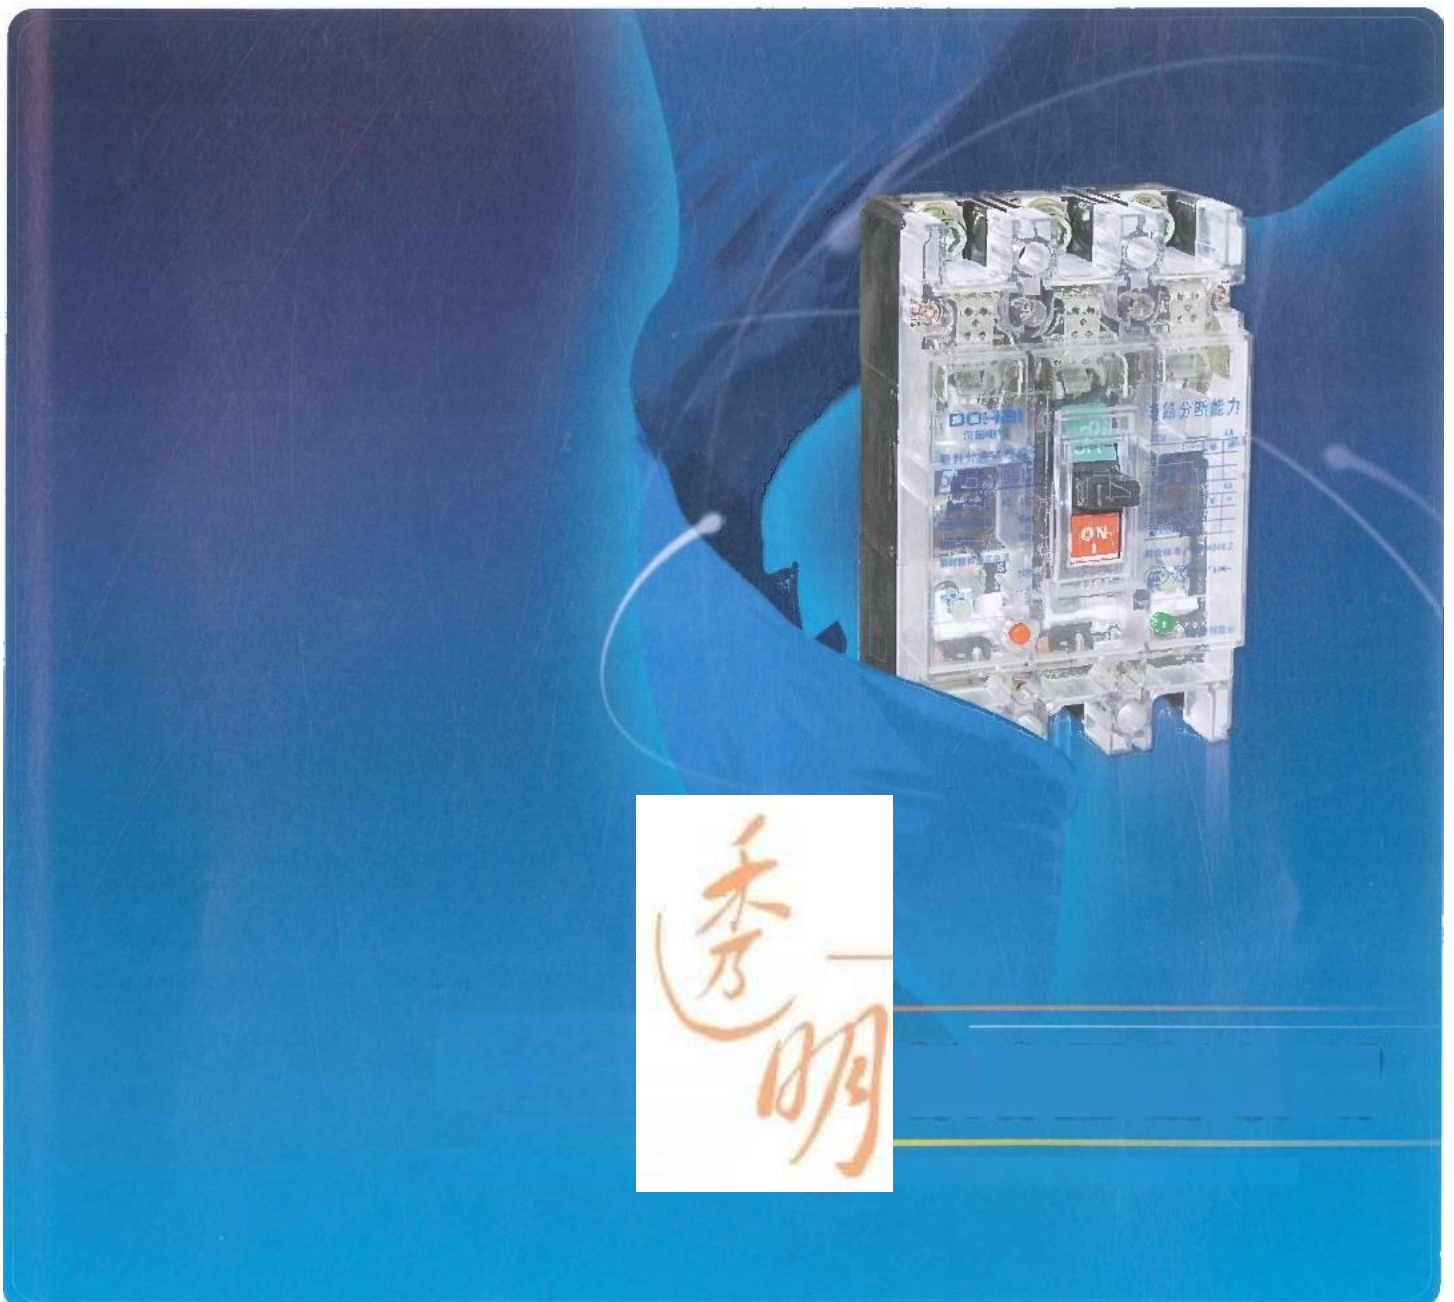

The PZ 30 series

Rated insulation

voltage of

modular terminal

combination

appliance: 400 V

Rated current: within 6~100 A

Short-time tolerance current:
15 KA / 1s

Housing protection level: IP30,
IP 41



JXF series

Hang the wall-type
power control box

Rated insulation

voltage: 400V, 660V

Rated working current:

10~400 A

Short-time withstand

current: 15 KA / 1s

housing protection

class: IP 40



XL-21

Low-voltage power
distribution box

Rated insulation voltage: 660 V

Rated current: 630A,

1000A short-time

withstand current:

30 KA

Housing protection level: IP 30



DHZ30

Transparent meter
box

Rated insulation voltage:
660 V

Main bus line rated current:
10A~225A

Main bus rated short time

withstand current: 35 KA

Housing protection class:

IP 30



DHJ series

Construction site box

Rated insulation voltage:
660 V

Rated working

current: 10~630 A

Short-time withstand

current: 10 / 17 KA

Housing protection level: IP44
operating face IP 21



DHG series

Low-voltage
distribution box of
the public power
grid

Rated insulation voltage: 660 V

Rated working

current: 10~630 A

Short-time withstand

current: 15 kA

Housing protection level: IP44

Compensation mode:

three-phase, single-

phase compensation,

three-phase and single -

phase compensation

are combined.

Port		QD00	OOK:
O		:::	:
D		:	
D		:	
O			
p			
o			
r			
t			

GGD

Low-voltage fixed switchgear

Rated insulation voltage:
AC660V, AC 1000V Rated
working current: 400~4000 A

Bus rated short time
tolerance
current: 50
KA, 80KA/1s

Housing protection level: IP 30



GCK

Rated
insulation
voltage of low
-voltage
suction-type
switchgear: AC
660V

Rated current: 4000
A and below short
time withstand
current: 50 KA,
80KA/1s

Shell protection level:
IP30, IP 40



GCS

Low-voltage pull-out switchgear

Rated insulation voltage:

AC660V, AC 1000V Rated

current: 4000 A and below

Short-time withstand

current: 50 KA, 80 KA / 1s

shell protection class:

IP30, IP 40



MNS

Rated

insulation

voltage of low-

voltage

extraction

switchgear:

AC660V

AC1000V

Rated current: 5000

A and below bus

rated short time

withstand current:

100 KA /

1s enclosure protection class:IP 40



ZDW

Intelligent high-frequency switch and DC power supply cabinet

AC input voltage: AC 380V $\pm$ 15%, 50 HZ

Three-phase four-wire system, two power supply input DC output voltage: DC220V, DC110V,

Battery capacity of DC48V and DC24V: 7Ah~3000Ah

Output loop: standard

configuration control

master (KM) 5, close

master (HM) 5

Housing protection level: IP30



KYN28A-12

Rated voltage of

metal armored

medium type switch

cabinet: 3.6, 7.2

and 12 KV

Rated current: 630~4000 A

Rated short circuit break

current: 16 ~ 50 KA

Housing protection class:

IP4X



XGN 2-12 (Z) box type

Fixed AC metal closed switchgear

Rated voltage:

3, 6, 7.2, 12KV Rated

current: 630~3150 A

Rated short circuit

break current: 16-40 KA

Housing protection

class: IP 2X



GG1A(F)-12

Fixed in-door AC metal closed switchgear

Rated voltage:

3, 6, 12 KV rated


current: 630~3150 A

Rated short circuit

break current: 16-40 KA

Housing protection

class: IP 2X

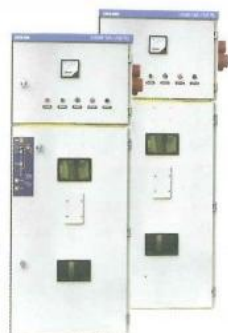

HXGN15A-12(F.R)

Box-type fixed indoor AC metal closure switch gear

Rated

voltage: 12

KV rated

current: 630

A

Rated short-time

withstand current:

20 KA Rated peak

withstand current:

50 KA Housing

protection class: IP

2X



XGN66A-12

Box-type fixed AC metal closed switchgear

Rated voltage:

3.6~12 KV rated

current: 630, 1250

A

Rated short circuit break

current: 20 ~ 31.5 KA

Housing protection class: IP

3X

Sets Series

Complete electrical series



XGN15-12(F.R)

Series SF6 combined
AC metal closed
switchgear

Rated voltage:
12 KV rated
current: 630 A

Rated short-circuit open and
closing current (type F/F.R):
50 / 80
KA 3s rated short time tolerance
current: 20 KA

Housing protection level: IP2X



YBM, YBP

Rated voltage
of series
preinstalled
substation:
6~35 kV

Rated current: 200~630A

Low voltage
100~3000 A rated
capacity: 50~1600 KVA

Rated short-time withstand
current: high voltage 20
12.5KA, Low pressure
15,30 KA shell protection grade:
IP23D



YB6-12/0.4

Pre-installed substation

Rated voltage: 10KV/0.4KV

Rated current: load switch
100~1000 A transformer
rated capacity: 100 ~ 1000
KVA rated short time
withstand current: high
voltage 20
12.5KA, Low pressure
15,30 KA shell protection class:
IP3X



DWF

Cable branch box

Rated voltage: 10 KV

Rated current: 630 A

Short-time
withstand current:
20 KA Housing
protection class:
IP33



TBB

Rated voltage of
high-voltage shunt
capacitor
compensation
device: 6~35 KV

Rated capacity of capacitor
bank: 1200 ~ 10000 kvar shell
protection grade: IP2X



KYN1-24(Z)

Armored removable
AC metal closed
switchgear

Rated voltage: 24 KV

Rated current: 630~3150 A

Rated short circuit
break current: 16 ~ 40
KA Housing protection
class: IP3X



KYN61-40.5

Armored removable
AC metal closed
switchgear

Rated voltage: 40.5 KV

Rated current of the main
bus: 1250~2000 A

Rated short circuit break
current: 125, 31.5 KA shell
protection class: IP4X



GBC-40.5

Rated voltage
of high
voltage switch
gear: 40.5 KV

Rated current of main bus:
1250~2000 A rated short
circuit break current:
25, 31.5 KA shell protection
class: IP2X

Sets Series

Complete electrical series



KYN1-12(Z)

Rated voltage of armored shift

AC metal closed switchgear:

3.6, 7.2 and 12 KV

Rated current: 630~3150 A

Rated short-time

withstand current: 16 ~

40 KA Housing protection

class: IP2X



JYN1-40.5

Interval shift AC metal closed

switchgear rated voltage: 40.5

KV

Rated current of the main bus: 1000~1600 A

Rated short circuit break

current: 20, 25, 31.5 KA Housing

protection class: IP2X



KYN10-40.5

Arved AC metal closed

switchgear rated voltage: 40.5

KV

Rated current of the main bus: 1250~1600 A

Rated short circuit break

current: 20, 25, 31.5 KA Housing

protection class: IP2X

New field of circuit breaker



DHM1

Series plastic
shell type circuit
breaker

·DHM1-
63LT/3300·DHM1-
100LT/3300·DHM1-
225LT/3300·DHM1-
400LT/3300·DHM1-
630LT/3300



DHM2

Series plastic
shell type
circuit breaker

·DHM2-
40T/290·DHM2-
40T/390·DHM2-
100T/290·DHM2-
100T/390



DZ15

Series plastic
shell type circuit
breaker

·DZ15-
40T/290·DZ15-
40T/390·DZ15-
100T/290·DZ15-
100T/390



DHM2LE

Series of
leakage
circuit
breaker ·

DHM2LE-40T /
290
·DHM2LE-
40T/390·DHM2LE-
40T/490·DHM2LE-
100T/290·DHM2LE-
100T/390
·DHM2LE-100T/490



DZ15LE

Series of
leakage
circuit
breaker ·

DZ15LE-40T /
290
·DZ15LE-40T/390
·DZ15LE-
40T/3N90·DZ15LE-
100T/290
·DZ15LE-100T/390
·DZ15LE-100T/3N90



DHM10

Series plastic
shell circuit
breaker · DHM
10-100T / 3300

·DHM10-
160T/3300·DHM10-
250T/3300·DHM10-
400T/3300·DHM10-
630T/3300



DZ20

Series plastic
shell circuit
breaker • DZ

20 Y-100T /

3300

·DZ20Y-
225T/3300·DZ20Y-
400T/3300·DZ20Y-
630T/3300·DZ20C-
250T/3300·DZ20C-
160T/3300



DZ20LE

Series of
leakage
circuit

breaker •

DZ20LE-160T /

4300 •

DZ20LE-250T /

4300 •

DZ20LE-400T /

4300 •

DZ20LE-630T /

4300



DZL25

Series of electric
leakage circuit
breaker

·DZL25-
100T/290·DZL25-
100T/390·DZL25-
100T/490·DZL25-
200T/4300·DZL25-
250T/4300



DZL18-20

Series of
electric leakage
protection
switch

·DZL18-20T/1

- ▶ Transparent small circuit breaker series
- ▶ Clear plastic shell circuit breaker series
- ▶ Transparent electric leakage circuit breaker series



DDM45(DZ47)

Series of high score broken small circuit breaker

- DDM45-63T-1P
- DDM45-63T-2P
- DDM45-63T-3P
- DDM45-63T-4P



DDM45LE(DZ47LE)

Series of electric leakage circuit breaker

- DDM45LE-63T-1P(+NK)
- DDM45LE-63T-2P(K)
- DDM45LE-63T-3P(K)
- DDM45LE-63T-4P(K)



DZ30-32(T)DHN6-32(T)

Series of high score broken small circuit breaker

- DZ30-32T-1P(6A-32A)
- DHN6-32T-1P(6A-32A)



DHLBM(LBM)

Leakage protector

- DHLBM-250A
- DHLBM-400A
- DHLBM-630A



The DHJZ energy-saving type

Contact-proof leakage protector of arc welding machine

- DHJZ-arc welding machine energy-saving secondary electric shock protector
- DHJZ energy-saving arc welding machine protector
- DHJZ energy-saving arc welding machine for touch protection

Leakage protector



DHF7 series

Pure electromagnetic type electric leakage circuit breaker

- DHF7-63-2P
- DHF7-63-4P



CJB1, CJB2, CJB8, CJB1(CJB10), CJB19, CJB20

Series of AC contactors

- CJB1-9-CJB1-85-CJB2-18-CJB1-12-CJB1-110
- CJB2-25-CJB1-16
- CJB1-140-CJB2-32-CJB1-22-CJB1-170
- CJB2-40-CJB1-32
- CJB2-50-CJB1-45
- CJB2-09-CJB2-63-CJB1-63-CJB2-12
- CJB2-80-CJB1-75-CJB2-16-CJB2-95



DDM5

Series of electric leakage circuit breaker

- DDM5-100
- DDM5-250
- DDM5-400
- DDM5-630



DZ30LE-32(T)DHN6LE-32(T)

Series of electric leakage circuit breaker

- DZ30LE-32T(6A-32A)
- DHN6LE-32T(6A-32A)



DHM1LE

Series of electric leakage circuit breaker

- DHM1LE-100LT/3300
- DHM1LE-100LT/4300
- DHM1LE-225LT/3300
- DHM1LE-225LT/4300
- DHM1LE-400LT/3300
- DHM1LE-400LT/4300
- DHM1LE-630LT/3300-DHM1LE-630LT/4300



DHM30LE

Series of electric leakage circuit breaker

- DHM30LE-100LT/3300
- DHM30LE-100LT/4300
- DHM30LE-225LT/3300
- DHM30LE-225LT/4300
- DHM30LE-400LT/3300
- DHM30LE-400LT/4300
- DHM30LE-630LT/3300-DHM30LE-630LT/4300

For more details, check at www.dohai.com

★ The enterprise has passed the ISO9001 2008 international quality management system certification;★

the products have obtained more than 100 China mandatory certification 3 C certificate;

★ The National Ministry of Construction of the recommended products;

★ Won the title of "Building innovative National

Outstanding Enterprise;

★ New product won the national utility model patent certificate.